

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

860011 - LD-CC-DALI-30


Leddriver constante spanning

876804.jpg

Package type: CT á 1 pce

PRODUCT SPECIFICATIONS:

Protocol	DALI
Model	Dynamic
Output power (W)	2 - 30
Housing	Plastic housing
Suitable for constant voltage	No
Output voltage (V)	8 - 55
Input voltage (V)	200 - 240
Suitable for DC-voltage (primary side)	No
Suitable for constant current	Yes
Output current (mA)	250 - 1000
Yes	
Degree of protection (IP)	IP20
Suitable for outdoor use	No
Length (mm)	170
Width (mm)	53.4
Height (mm)	28
Rated frequency (Hz)	50 - 60
0.9	
Max. starting current (A)	8
Ambient temperature (°C)	-20 - +45
White	
No	
Number of channels	1
3 - 11	
3 - 8	
1 - 5	
1 - 4	
Frequency input voltage (Hz)	50 - 60
Independently operating	Yes
Yes	
Overload protection	Yes
Yes	
Overtemperature protection	Yes
Yes	
Yes	
Short-circuit protected	Yes
No	
None	
Dimmable	Yes
Operation by Bluetooth	No
Dimming DALI-2	Yes
IFTTT support available	No
Compatible with Google Assistant	No
Compatible with Amazon Alexa	No

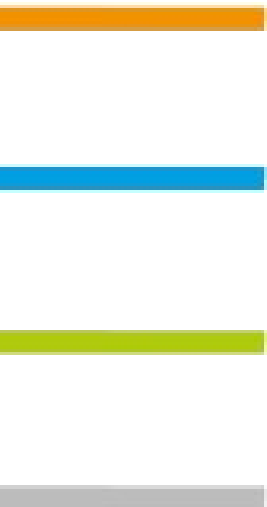

Compatible with Casambi	No
Dimming potentiometer (integrated)	No
Compatible with Apple HomeKit	No
Dimming RF	No
Dimming manufacturer's proprietary system	No
Dimming 1-10 V	No
Dimming LineSwitch	No
Dimming phase cut-on	No
Dimming DALI	Yes
Dimming programmable (%)	Yes
	0.1 - 100
Dimming DMX	No
Dimming mains voltage modulation	No
Constant light output (CLO)	No
Dimming Touch and Dim	No
Dimming DSI	No
Dimming Zigbee	No
Dimming phase cut-off	No
Dimming 0-10 V	No
Dimming with push-button	Yes
No	