

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

/productimages/860050.jpg


Leddriver constante stroom

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

Model	Dynamic
Output power (W)	3 - 6.3
Housing	Plastic housing
Suitable for constant voltage	No
Output voltage (V)	4.3 - 9
Input voltage (V)	100 - 240
Suitable for DC-voltage (primary side)	No
Suitable for constant current	Yes
Output current (mA)	700 - 700
No	
Degree of protection (IP)	IP20
Protection class	II
Suitable for outdoor use	No
Length (mm)	55.6
Width (mm)	38.5
Height (mm)	21.8
(V)	4.3 - 9
Rated frequency (Hz)	50 - 60
0.9	
Max. starting current (A)	4.5
Ambient temperature (°C)	-20 - +5
White	
No	
Number of channels	1
2 - 2	
Frequency input voltage (Hz)	50 - 60
Independently operating	Yes
Yes	
Overload protection	Yes
Yes	
Overtemperature protection	Yes
Yes	
Yes	
No	
None	
Operation by Bluetooth	No
Dimming DALI-2	No
Compatible with Casambi	No
Dimming potentiometer (integrated)	No
Suitable for pulse button	No
Dimming 1-10 V	No
Dimming phase cut-on	No

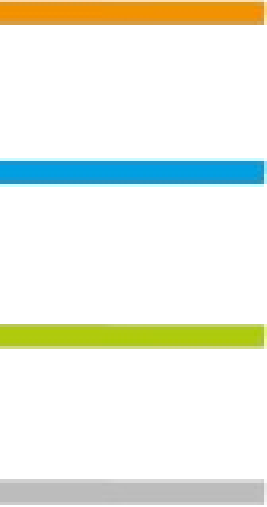

Dimming DALI	No
Dimming DMX	No
Constant light output (CLO)	No
Dimming Touch and Dim	No
Dimming DSI	No
Dimming Zigbee	No
Dimming phase cut-off	No
Dimming 0-10 V	No
Dimming with push-button	No