

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

868303 - LM-DL18-UGR-WW

Lumiko modulair downlighters


Package type: CT á 1 pce

/productimages/868303.jpg



PRODUCT SPECIFICATIONS:

Mounting method	Built-in
Colour temperature (K)	3000 - 3000
Colour of light adjustable	No
Rated luminous flux according to IEC 62722-2-1 (lm)	1850
(lm)	0 - 1850
Nominal current (mA)	110 - 500
Nominal voltage (V)	36 - 36
Voltage type	DC
Max. system power (W)	18.3
Energy efficiency class of the light source according to EU regulation 2019/2015	E
Beam angle (°)	90
Built-in depth (mm)	125
Height/depth (mm)	125
Outer diameter (mm)	120
Built-in diameter (mm)	107 - 107
Housing colour	Aluminium
Degree of protection (IP), front side	IP20
IP20	
Degree of protection (IP)	IP20
Suitable for wall mounting	No
Luminous flux adjustable	Continuously variable
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	No
Suitable for clamp-mounting	Yes
Adjustability	not adjustable
With movement sensor	No
With light sensor	No
Lamp type	LED not exchangeable
With light source	Yes
Electrical connection with connector system	Yes
Type of control gear	LED operating device current-controlled
With control gear	No
Colour of light	White
Housing material	Aluminium
Reflector	High-gloss
Light sharing	Symmetric
Colour rendering index CRI	80-89
Suitable for built-in mounting	Yes
Optics	Reflector
Suitable for low voltage cable system	No
No	
(cm)	50

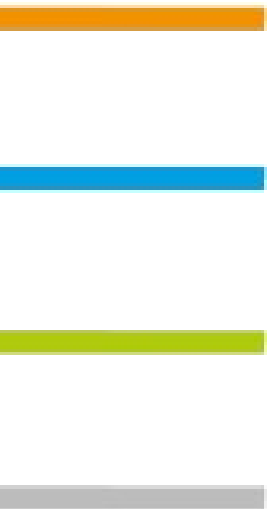

Light distributor	Refractor lens
Reflector colour	Silver
Light outlet	Direct
Number of poles	2
Suitable for workplace according to EN 12464-1	Yes
Unified Glare Ratio (UGR)	18
Lamp power (W)	18
Dimming manufacturer's proprietary system	No
Other	